

# Built-In Refrigerator

E42BS75EPS professional series



### True Built-In Side-By-Side

Flush stainless steel dispenser fascia, toe kick and grille cover blend harmoniously with the exterior of this slim profile refrigerator to create a true built-in look.



### Express Ice™

Creates ice according to your family's needs with the touch of a button.



### PureAdvantage® Water Filtration System

The most advanced water filtration system available offers cleaner, fresher ice and water. A status light alerts when the filter needs to be replaced, then with one touch, the drip-free cartridge can be exchanged.



### Dynamic Cool™ with Custom-Set™ Digital Temperature Control System

Sensor-controlled chilling with dual evaporator cooling system. Amazingly consistent interior temperature will keep your food fresher longer.

## 42" BUILT-IN REFRIGERATOR

### CAPACITIES

Total Capacity	25.2 Cu. Ft.
Fresh Food Volume	15.6 Cu. Ft.
Freezer Volume	9.6 Cu. Ft.

### EXTERIOR

Ice/Water Dispenser –	
Electronic Touch Control	Yes
Night Light	Yes
Temperature Display	Yes
Crushed/Cubes/Water	Yes
Express Ice™	Yes
Lock	Yes
Filter Reset	Yes
Interior Easy Access Door	Yes

### FRESH FOOD CONVENIENCES

Filtration System	PureAdvantage®
Filter Location	Front
Door Ajar Alarm	Yes
Encapsulated Sliding Glass Shelves	3
Smooth-Glide™ Crisper Drawers	3
Humidity Controls	2
1-Gallon Fixed Door Bin	1
2-Liter Adjustable Door Bin	3
Dairy Compartment with Clear Door	1
Door Bin Snugglers	3
Theatre Lighting	Yes
Dynamic Cool™ Digital Temperature Control System	Yes

### FREEZER CONVENIENCES

Automatic Ice Maker with Ice Server	Factory Installed
Smooth-Glide™ Baskets	2
Fixed Door Bin	3
Dual-Level Lighting	Yes

### INSTALLATION

Adjustable Rollers	Yes
Door Stops	Yes


### SPECIFICATIONS

Overall Exterior Dimensions –	
Height	84"
Width	42"
Depth (Including Handle) (with 90° Door Open)	26-7/8" 47-7/8"
Power Cord Location	Right Top Rear
Water Line Inlet Location	Left Bottom Front
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW Rating) @ 120 Volts†	0.65
Shipping Weight (Approx.)	630 Lbs.

†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and/or national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [electroluxicon.com](http://electroluxicon.com).

Specifications subject to change.

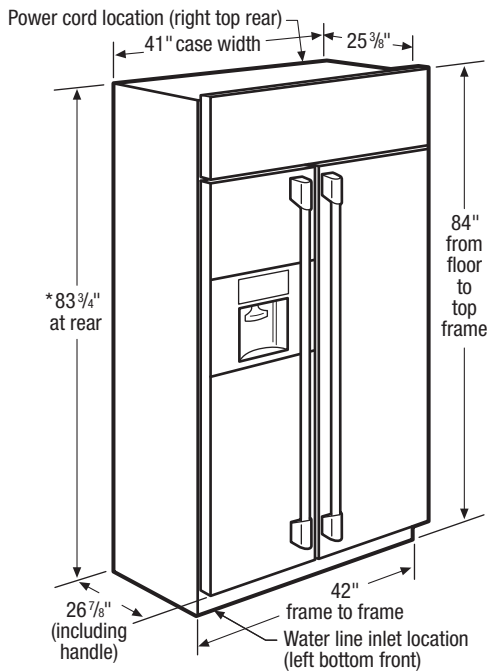


\*Shipping height. (Front height may be adjusted from 83-1/2" to 84-1/2" by adjusting leveling legs a max. of 1".)

### Cutout Dimensions

(A) Finished opening:  
83 1/2" min.  
84 1/2" max.


(B) 41 1/2"

(C) 24"




### Door-Swing Clearances

Refrigerator equipped with 2-position door stop. Factory set to 130°; adjustable to 90° if clearance to adjacent cabinets or wall is restricted.



### Notes:

A 4" min. door clearance is required when using 90° door stop position. Drawer access is maintained, but removal is restricted. To determine door swing interaction with adjacent cabinets and countertops refer to Product Installation Guide on web at [electroluxicon.com](http://electroluxicon.com).



### 42" Built-In Refrigerator Specifications

- Product Weight – 610 Lbs.
- Voltage Rating – 120V/ 60Hz/ 15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.65kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 5.4 Amps
- Always consult local and/or national electric & plumbing codes.
- Cutout must be prepared with electrical and water supply located as shown. When possible, recess copper water line and electrical outlet.
- Water line can enter opening through floor or rear wall. Copper tubing recommended between cold water line and water connection location. Water line tubing recommended is 48" minimum length by 1/4" diameter. Installation of easily accessible shutoff valve in water line required.

- Optimum door swing factory set for 130°. When installing next to wall where handle may make contact, allow 4" minimum clearance for 90° door swing. At 90° door stop position, drawer access will be maintained but removal will be restricted.
- Refrigerator must be placed on level surface of hard material, same height as flooring. Surface must support approximately 1500 Lbs. when fully loaded. Unit equipped with 4-point leveling.

**Note: For planning purposes only. Refer to Product Installation Guide on the web at [electroluxicon.com](http://electroluxicon.com) for detailed instructions.**